

DRAGONFLY

HIGH PRESSURE ROTARY NOZZLE

SURFACE PREPARATION

aluminum housing, lightweight at 1050 g, with tremendous mobility, simple handling and long operation times

compact construction with magnetic break, low-maintenance, giving lengthy uninterrupted operating time

optimised diameter Ø49 mm, versatile, suitable for multiple applications

connection pieces, shaft, titanium nozzle holder, extremely resistant to pressure, corrosion resistant and insensitive to dirt

oil-free, prevents dry running and contamination of the environment from leaking oil

nozzle protection of hardened steel, highly wear resistant even under intense conditions

perfect jetting pattern, four nozzle openings on two diameters, for a high surface coverage

Standard Accessories



e1211013
holder for jetting check and nozzle change

Spare Parts



e1210941
nozzle protection plate




z0000782
large repair-kit

Optional Accessories



e1230726
connection-piece M14-1h inner thread

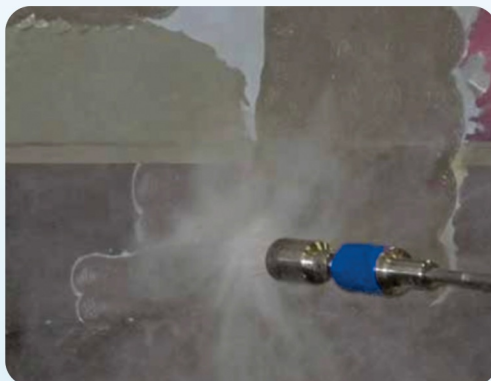

pointspeed 30

	500 - 3000 bar
	10 - 50 l/min
	max. 70° C
	self drive
	125 kW, 500 - 4000 rpm
	017 USgal/min
	9/16" unf-1h inner thread
	1,05 kg
	205 x 49 mm

STANDARD NOZZLES: (2500BAR / 20 L)

1+2 POINT JET NOZZLE 0 DEGREE 3000 BAR, M10 OUTER THREAD, NOZZLE SIZE 0015/1,50 MM SAPPHIRE STYLE 9

3+4 POINT JET NOZZLE 0 DEGREE 3000 BAR, M10 OUTER THREAD, NOZZLE SIZE 0032/0,40 MM SAPPHIRE STYLE 9



TOTAL BLASTING
water jetting technologies

