DRAGONFLY


HIGH PRESSURE ROTARY NOZZLE

SURFACE PREPARATION

aluminum housing, lightweight at 1050 g, with tremendous mobility, simple handling and long operation times

compact construction with magnetic break, low-maintenance, giving lengthy uninterrupted operating time

optimised diameter Ø49 mm, versatile, suitable for multiple applications

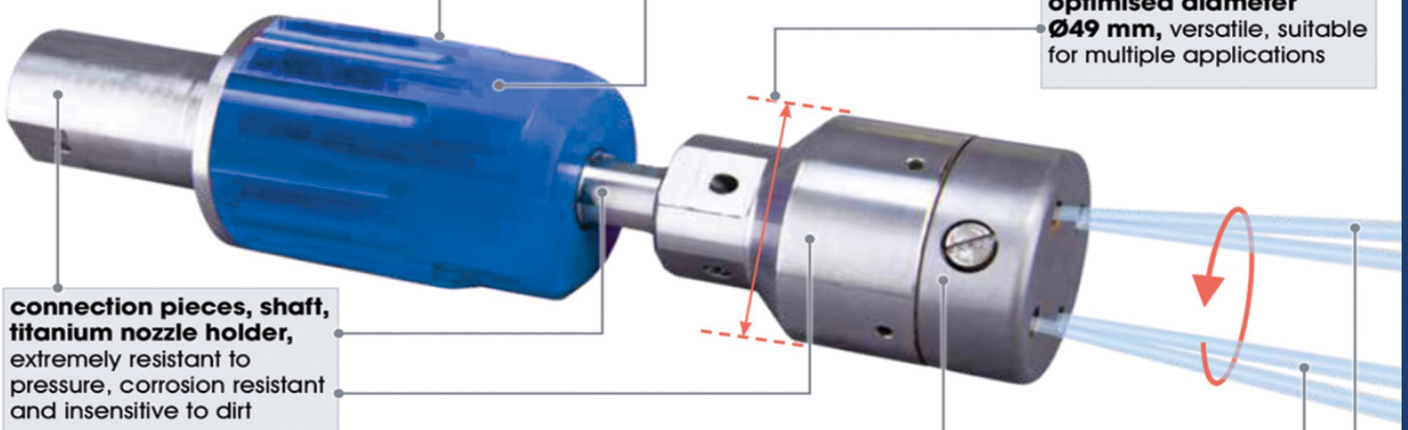

connection pieces, shaft, titanium nozzle holder, extremely resistant to pressure, corrosion resistant and insensitive to dirt

oil-free, prevents dry running and contamination of the environment from leaking oil

nozzle protection of hardened steel, highly wear resistant even under intense conditions

perfect jetting pattern, four nozzle openings on two diameters, for a high surface coverage

Standard Accessories	Spare Parts		Optional Accessories
 holder for jetting check and nozzle change	 nozzle protection plate	 large repair-kit	 connection-piece M14-lh inner thread





	500 - 3000 bar
	10 - 50 l/min
	max. 70° C
	self drive
	125 kW, 500 - 4000 rpm
	017 USgal/min
	9/16" unf-lh inner thread
	1,05 kg
	205 x 49 mm

STANDARD NOZZLES: (2500BAR / 20 L)

1+2 POINT JET NOZZLE 0 DEGREE 3000 BAR, M10 OUTER THREAD, NOZZLE SIZE 0015/1,50 MM SAPPHIRE STYLE 9

3+4 POINT JET NOZZLE 0 DEGREE 3000 BAR, M10 OUTER THREAD, NOZZLE SIZE 0032/0,40 MM SAPPHIRE STYLE 9

TOTAL BLASTING
water jetting technologies

DRAGONFLY